


3-Port Atmospherically Referenced, Non-adjustable

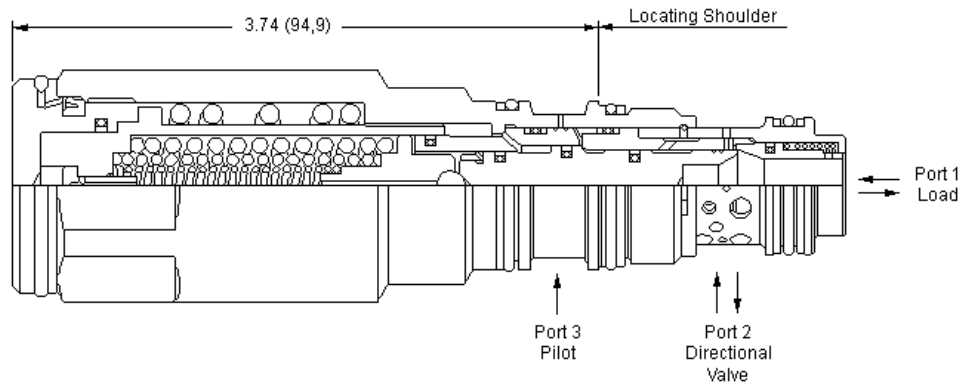

in (mm)

These valves are self-setting counterbalance valves which combine multiple functions in one package; reverse free flow, load, and thermal relief. The check allows free flow from the directional valve (port 2) to the load (port 1) while a direct-acting pilot function self adjusts to approximately 1.3 times the load induced pressure up to the thermal relief setting. Backpressure at port 2 does not affect self setting performance because the spring chamber references the atmosphere.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Factory Pressure Settings Established at	30 cc/min.
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at Reseat	0,3 cc/min.
Check Cracking Pressure	1,7 bar
Reseat	>85% of setting
Seal kit - Cartridge	Buna: 990202007
Seal kit - Cartridge	Polyurethane: 990002002
Seal kit - Cartridge	Viton: 990202006

NOTES

- Patents are pending for this product.
- The pressures listed under FACTORY SET are approximate, mean values and should not be used for inspection purposes.

CONFIGURATION OPTIONS

Model Code Example: MAEPDHN

CONTROL	(D) FACTORY SET	(H) SEAL MATERIAL	(N) MATERIAL/COATING
D LoadMatch™	H 4000 psi (280 bar) G 6000 psi (420 bar) J 5000 psi (350 bar)	N Buna-N V Viton	Standard Material/Coating /LH Mild Steel, Zinc-Nickel